


central loose tube tape outdoor cable

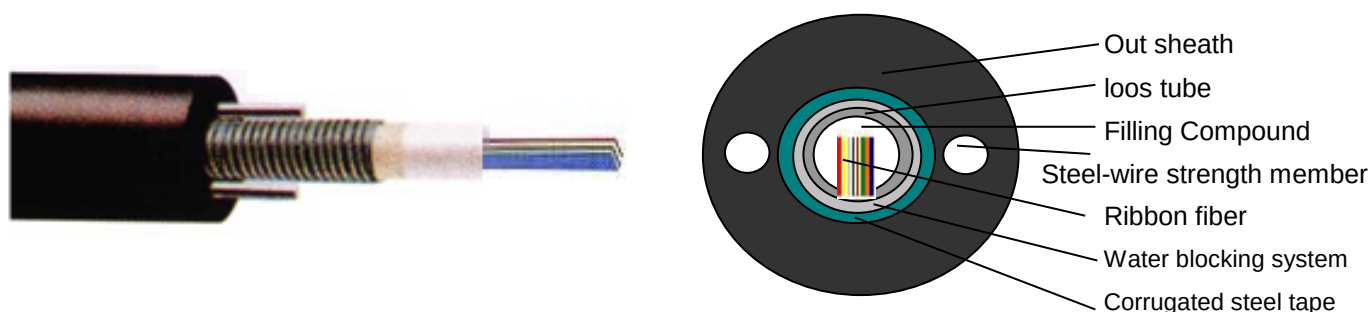

Application

Adopted to Outdoor distribution

Suitable for aerial pipeline laying method

Long distance and local area network communication

Characteristics

Steel-wire parallel member filler protect tube fiber steel tape amorect structure light weight

Excellent mechanical and environmently and operated simply

Can be installed conveniently and operated simply

Technical parameters:

cable count (Cores)	out sheath diameter (mm)	Weight (Kg)	Minimum allowable Tensile		Minimum allowable Crush load		Min bending radius(MM)		Suitable temperature (℃)
			short term	long term	short term	long term	short term	long term	
24	15	240.00	1500	600	1000	300	20D	10D	-40+60
48	15	240.00	1500	600	1000	300	20D	10D	-40+60
60	15	240.00	1500	600	1000	300	20D	10D	-40+60
72	16	272.00	1500	600	1000	300	20D	10D	-40+60
84	16	272.00	1500	600	1000	300	20D	10D	-40+60
144	18	325.00	1500	600	1000	300	20D	10D	-40+60

光纤标准对照Fiber standard control

Fiber Type	Multi-mode	G.651	A1a:50/125	Gradient-type refractive index
			A1b:50/126	
	Single-mode	G.652(A、B、C、D)		B1.1 routines
		G.653		B2 Zero dispersion-shifted
		G.654		B1.2 Cutoff wavelength shift
	Single-mode	G.655		B4 Non-zero dispersion-shifted