



ECN NO.	REVISED DESCRIPTION	REVISION	DATE
	PRELIMINARY	A	2026.08.17

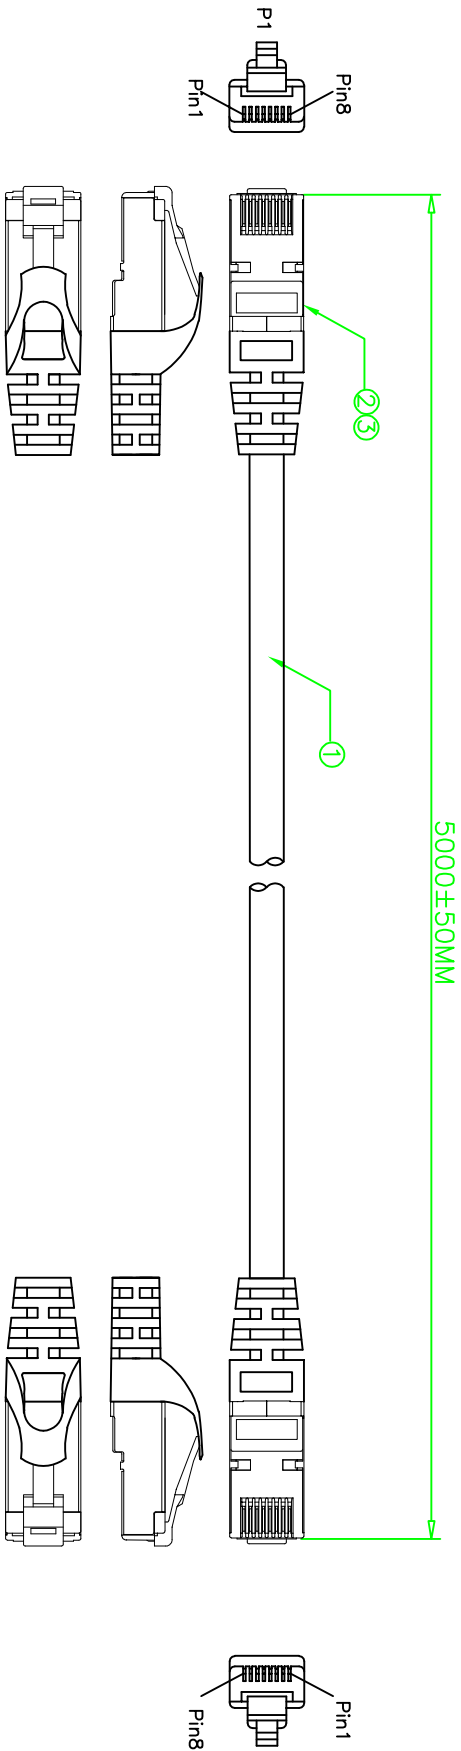

- 1.ELECTRICAL TEST:
1.1. 100% OPEN&SHORT&MISS WIRE TEST;
1.2. CONDUCTOR RESISTANCE: 1.50mΩ/M(Max)
1.3. INSULATION RESISTANCE: 2M(Min)
1.4. HI-POT: DC 300V 0.01S

WIRE CONNECTION

COLOR(568B)	P1	PAIRS	P2
WHITE	1	Orange-White	1
ORANGE	2	Orange	2
WHITE	3	Green-White	3
BLUE	4	Blue	4
WHITE	5	Blue-White	5
GREEN	6	Green	6
WHITE	7	Red-White	7
BROWN	8	Red	8
DRAIN	SHELL	—	SHELL

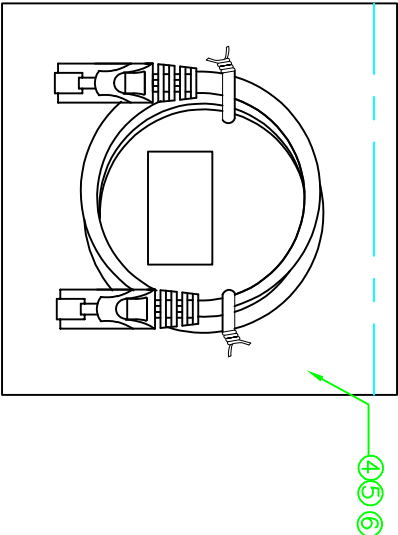

NO.	ITEM	DESCRIPTION	Q'TY	UNIT
5	BAG	POLY-BAG	1	PCS
4	TIE	WIRE TIE OF PVC	2	PCS
3	HOOD	MOLDED OF PVC	9	G
2	CONN.	RJ45 PLUG 8P8C,LONG BODY, PIN GOLD PLATED;SHELL NICKEL-PLATED	2	PCS
1	CABLE	CAT.5E FTP 26AWG*4P+D+AL+PVC JACKET OD5.8±0.2mm	N/A	MM



ASSEMBLY DRAWING						
GENERAL TOLERANCES UNLESS SPECIFIED						
X±0.30	X°±3.5°	SCALE	NONE	REV	A/0	
X±0.25	X°±2.5°	UNIT	mm	SIZE	A4	
.XX±0.15	.X°±2.0°	CUSTOMER:				1/1
APPROVED: Andy		CAT.5E FTP CABLE				
CHECKED: Lily	PRODUCT NO:	CAT.5E FTP CABLE				
DRAWN: Mike	DWG NO:					